





























장비 일람표


장비번호	수 량 (대)	형 식	냉방용량/난방용량 (Kcal/h)	팬			배관 SIZE			외형치수(mm) (H * W * D)	중 량 (Kg)	냉 매	전 원	운전전류(A)	소비전력(KW)	비 고
				형 식	풍 량 (CMM)	정격출력 (W)	냉매가스관 (●mm)	냉매액관 (●mm)	드레인							
	67	천장형 카세트 1-WAY	2,494 / 2,752	Turbo	9	22	9.52	6.35	25A	235 * 850 * 400	22	R-410A	1상 , 220V , 60Hz	0.26	0.056	기타 표준부속품 일체구비
	3	천장형 카세트 C-WAY	3,956 / 4,300	Turbo	11	60	12.7	6.35	25A	268 * 575 * 575	17	R-410A	1상 , 220V , 60Hz	0.33	0.041	기타 표준부속품 일체구비
	2	천장형 카세트 4-WAY	2,494 / 2,752	Turbo	13.3	14	9.52	6.35	25A	256 * 840 * 840	18	R-410A	1상 , 220V , 60Hz	0.24	0.021	기타 표준부속품 일체구비
	3	천장형 카세트 4-WAY	3,956 / 4,300	Turbo	15.5	14	12.7	6.35	25A	256 * 840 * 840	20	R-410A	1상 , 220V , 60Hz	0.28	0.023	기타 표준부속품 일체구비
	500	천장형 카세트 4-WAY	4,902 / 5,418	Turbo	17.5	14	12.7	6.35	25A	256 * 840 * 840	20	R-410A	1상 , 220V , 60Hz	0.30	0.026	기타 표준부속품 일체구비
	158	천장형 카세트 4-WAY	6,278 / 6,880	Turbo	20	20	15.88	9.52	25A	256 * 840 * 840	20	R-410A	1상 , 220V , 60Hz	0.39	0.036	기타 표준부속품 일체구비
	3	천장형 카세트 4-WAY	7,052 / 7,740	Turbo	20	20	15.88	9.52	25A	256 * 840 * 840	20	R-410A	1상 , 220V , 60Hz	0.39	0.036	기타 표준부속품 일체구비
	41	천장형 카세트 4-WAY	7,912 / 8,600	Turbo	22	20	15.88	9.52	25A	256 * 840 * 840	20	R-410A	1상 , 220V , 60Hz	0.45	0.043	기타 표준부속품 일체구비
	26	천장형 카세트 4-WAY	9,804 / 10,750	Turbo	32	68	15.88	9.52	25A	319 * 840 * 840	25	R-410A	1상 , 220V , 60Hz	0.76	0.088	기타 표준부속품 일체구비
	4	천장형 카세트 4-WAY	12,298 / 13,760	Turbo	35.5	72	15.88	9.52	25A	319 * 840 * 840	25	R-410A	1상 , 220V , 60Hz	0.92	0.112	기타 표준부속품 일체구비
	5	실내기 스탠드	6,278 / 6,880	원심력 팬	20	20	15.88	9.52	25A	1,750 * 600 * 390	49	R-410A	1상 , 220V , 60Hz	0.9	0.195	기타 표준부속품 일체구비
	1	실내기 스탠드	14,018 / 15,480	원심력 팬	20	20	15.88	9.52	25A	1,750 * 600 * 390	49	R-410A	1상 , 220V , 60Hz	0.9	0.195	기타 표준부속품 일체구비
	1	실내기 스탠드	14,018 / 15,480	원심력 팬	32	68	15.88	9.52	25A	1,750 * 600 * 390	65	R-410A	1상 , 220V , 60Hz	1.37	0.295	기타 표준부속품 일체구비
합계	814															

[illegible]


장비 일람표	

■ 가 변 형 히 트 펌 프 냉 난 방 기 (실외기) 류																		
장비번호	수 량 (대)	모 델	냉방용량/난방용량 (Kcal/Hr)	압 축 기 형 식	송 풍 기			배 관		외형치수(mm) (H x W x D)	중 량 (kg)	냉 매	전 원	운전전류(A)		소비전력(kw)		비 고
					형 식	풍 량 (CMM)	전동기 출력 (kW)	냉매가스관 (●mm)	냉매액관 (●mm)					냉방시	난방시	냉방시	난방시	
	4	용량가변형 히트펌프	19,694 / 21,500	ALL-DC Inverter (Twin)	Propeller	165	0.6	22.22	12.7	1,800x990x750	258	R-410A	3상,380V,60Hz,4선	9.12	9.40	5.7	5.88	기타 표준부속품 일체구비
	3	용량가변형 히트펌프	24,596 / 27,090	ALL-DC Inverter (Twin)	Propeller	175	0.6	22.22	12.7	1,800x990x750	258	R-410A	3상,380V,60Hz,4선	12.22	12.61	7.72	7.97	기타 표준부속품 일체구비
	4	용량가변형 히트펌프	29,412 / 32,250	ALL-DC Inverter (Twin)	Propeller	175	0.6	28.58	12.7	1,800x990x750	258	R-410A	3상,380V,60Hz,4선	19.37	16.47	11.98	10.19	기타 표준부속품 일체구비
	2	용량가변형 히트펌프	39,474 / 43,000	ALL-DC Inverter (Twin)	Propeller	165 165	0.6x2	28.58	15.88	1,800 x 2000 x 750	516	R-410A	3상,380V,60Hz,4선	19.61	19.64	12.26	12.28	기타 표준부속품 일체구비
	2	용량가변형 히트펌프	44,290 / 48,590	ALL-DC Inverter (Twin)	Propeller	175 165	0.6x2	28.58	15.88	1,800 x 2000 x 750	516	R-410A	3상,380V,60Hz,4선	22.52	22.74	14.23	14.37	기타 표준부속품 일체구비
	9	용량가변형 히트펌프	49,192 / 54,180	ALL-DC Inverter (Twin)	Propeller	175 175	0.6x2	28.58	15.88	1,800 x 2000 x 750	516	R-410A	3상,380V,60Hz,4선	25.72	26.05	16.25	16.46	기타 표준부속품 일체구비
	1	용량가변형 히트펌프	59,770 / 65,790	ALL-DC Inverter (Twin)	Propeller	175 175	0.6x2	34.92	15.88	1,800 x 2000 x 750	516	R-410A	3상,380V,60Hz,4선	40.23	33.74	25.15	21.32	기타 표준부속품 일체구비
	1	용량가변형 히트펌프	64,156 / 70,090	ALL-DC Inverter (Twin)	Propeller	175 165 165	0.6x3	34.92	19.05	1,800 x 3,010 x 750	774	R-410A	3상,380V,60Hz,4선	32.27	32.80	20.39	20.51	기타 표준부속품 일체구비
	4	용량가변형 히트펌프	68,972 / 75,680	ALL-DC Inverter (Twin)	Propeller	175 175 165	0.6x3	34.92	19.05	1,800 x 3,010 x 750	774	R-410A	3상,380V,60Hz,4선	35.42	35.77	22.38	22.60	기타 표준부속품 일체구비
	14	용량가변형 히트펌프	73,788 / 81,700	ALL-DC Inverter (Twin)	Propeller	175 175 175	0.6x3	34.92	19.05	1,800 x 3,010 x 750	774	R-410A	3상,380V,60Hz,4선	38.59	38.88	24.38	24.82	기타 표준부속품 일체구비
	2	용량가변형 히트펌프	79,034 / 86,000	ALL-DC Inverter (Twin)	Propeller	175 175 175	0.6x3	34.92	19.05	1,800 x 3,010 x 750	774	R-410A	3상,380V,60Hz,4선	45.56	42.83	28.79	26.78	기타 표준부속품 일체구비
	1	용량가변형 히트펌프	98,568 / 102,770	ALL-DC Inverter (Twin)	Propeller	175 175 175 165	0.6x4	41.28	22.22	1,800 x 4,020 x 750	1032	R-410A	3상,380V,60Hz,4선	48.29	48.79	30.51	30.83	기타 표준부속품 일체구비
	10	용량가변형 히트펌프	98,384 / 108,790	ALL-DC Inverter (Twin)	Propeller	175 175 175 175	0.6x4	41.28	22.22	1,800 x 4,020 x 750	1032	R-410A	3상,380V,60Hz,4선	51.46	52.31	32.52	33.05	기타 표준부속품 일체구비
	2	용량가변형 히트펌프	103,630 / 113,520	ALL-DC Inverter (Twin)	Propeller	175 175 175 175	0.6x4	41.28	22.22	1,800 x 4,020 x 750	1032	R-410A	3상,380V,60Hz,4선	58.45	56.20	36.93	35.14	기타 표준부속품 일체구비
	5	용량가변형 히트펌프	114,208 / 124,700	ALL-DC Inverter (Twin)	Propeller	175 175 175 175	0.6x4	41.28	22.22	1,800 x 4,020 x 750	1032	R-410A	3상,380V					


장비번호	수 량 (대)	모 델	냉방용량/난방용량 (Kcal/Hr)	압 축 기 형 식	송 풍 기			배 관		외형치수(mm) (H x W x D)	중 량 (kg)	냉 매	전 원	운전전류(A)		소비전력(kw)		비 고
					형 식	풍 량 (CMM)	전동기 출력 (kW)	냉매가스관 (●mm)	냉매액관 (●mm)					냉방시	난방시	냉방시	난방시	
	4	용량가변형 히트펌프	19,694 / 21,500	ALL-DC Inverter (Twin)	Propeller	165	0.6	22.22	12.7	1,800x990x750	258	R-410A	3상,380V,60Hz,4선	9.12	9.40	5.7	5.88	기타 표준부속품 일체구비
	3	용량가변형 히트펌프	24,596 / 27,090	ALL-DC Inverter (Twin)	Propeller	175	0.6	22.22	12.7	1,800x990x750	258	R-410A	3상,380V,60Hz,4선	12.22	12.61	7.72	7.97	기타 표준부속품 일체구비
	4	용량가변형 히트펌프	29,412 / 32,250	ALL-DC Inverter (Twin)	Propeller	175	0.6	28.58	12.7	1,800x990x750	258	R-410A	3상,380V,60Hz,4선	19.37	16.47	11.98	10.19	기타 표준부속품 일체구비
	2	용량가변형 히트펌프	39,474 / 43,000	ALL-DC Inverter (Twin)	Propeller	165 165	0.6x2	28.58	15.88	1,800 x 2000 x 750	516	R-410A	3상,380V,60Hz,4선	19.61	19.64	12.26	12.28	기타 표준부속품 일체구비
	2	용량가변형 히트펌프	44,290 / 48,590	ALL-DC Inverter (Twin)	Propeller	175 165	0.6x2	28.58	15.88	1,800 x 2000 x 750	516	R-410A	3상,380V,60Hz,4선	22.52	22.74	14.23	14.37	기타 표준부속품 일체구비
	9	용량가변형 히트펌프	49,192 / 54,180	ALL-DC Inverter (Twin)	Propeller	175 175	0.6x2	28.58	15.88	1,800 x 2000 x 750	516	R-410A	3상,380V,60Hz,4선	25.72	26.05	16.25	16.46	기타 표준부속품 일체구비
	1	용량가변형 히트펌프	59,770 / 65,790	ALL-DC Inverter (Twin)	Propeller	175 175	0.6x2	34.92	15.88	1,800 x 2000 x 750	516	R-410A	3상,380V,60Hz,4선	40.23	33.74	25.15	21.32	기타 표준부속품 일체구비
	1	용량가변형 히트펌프	64,156 / 70,090	ALL-DC Inverter (Twin)	Propeller	175 165 165	0.6x3	34.92	19.05	1,800 x 3,010 x 750	774	R-410A	3상,380V,60Hz,4선	32.27	32.80	20.39	20.51	기타 표준부속품 일체구비
	4	용량가변형 히트펌프	68,972 / 75,680	ALL-DC Inverter (Twin)	Propeller	175 175 165	0.6x3	34.92	19.05	1,800 x 3,010 x 750	774	R-410A	3상,380V,60Hz,4선	35.42	35.77	22.38	22.60	기타 표준부속품 일체구비
	14	용량가변형 히트펌프	73,788 / 81,700	ALL-DC Inverter (Twin)	Propeller	175 175 175	0.6x3	34.92	19.05	1,800 x 3,010 x 750	774	R-410A	3상,380V,60Hz,4선	38.59	38.88	24.38	24.82	기타 표준부속품 일체구비
	2	용량가변형 히트펌프	79,034 / 86,000	ALL-DC Inverter (Twin)	Propeller	175 175 175	0.6x3	34.92	19.05	1,800 x 3,010 x 750	774	R-410A	3상,380V,60Hz,4선	45.56	42.83	28.79	26.78	기타 표준부속품 일체구비
	1	용량가변형 히트펌프	98,568 / 102,770	ALL-DC Inverter (Twin)	Propeller	175 175 175 165	0.6x4	41.28	22.22	1,800 x 4,020 x 750	1032	R-410A	3상,380V,60Hz,4선	48.29	48.79	30.51	30.83	기타 표준부속품 일체구비
	10	용량가변형 히트펌프	98,384 / 108,790	ALL-DC Inverter (Twin)	Propeller	175 175 175 175	0.6x4	41.28	22.22	1,800 x 4,020 x 750	1032	R-410A	3상,380V,60Hz,4선	51.46	52.31	32.52	33.05	기타 표준부속품 일체구비
	2	용량가변형 히트펌프	103,630 / 113,520	ALL-DC Inverter (Twin)	Propeller	175 175 175 175	0.6x4	41.28	22.22	1,800 x 4,020 x 750	1032	R-410A	3상,380V,60Hz,4선	58.45	56.20	36.93	35.14	기타 표준부속품 일체구비
	5	용량가변형 히트펌프	114,208 / 124,700	ALL-DC Inverter (Twin)	Propeller	175 175 175 175	0.6x4	41.28	22.22	1,800 x 4,020 x 750	1032	R-410A	3상,380V,60Hz,4선	73.29	63.73	45.82	39.85	기타 표준부속품 일체구비
합계	64																	

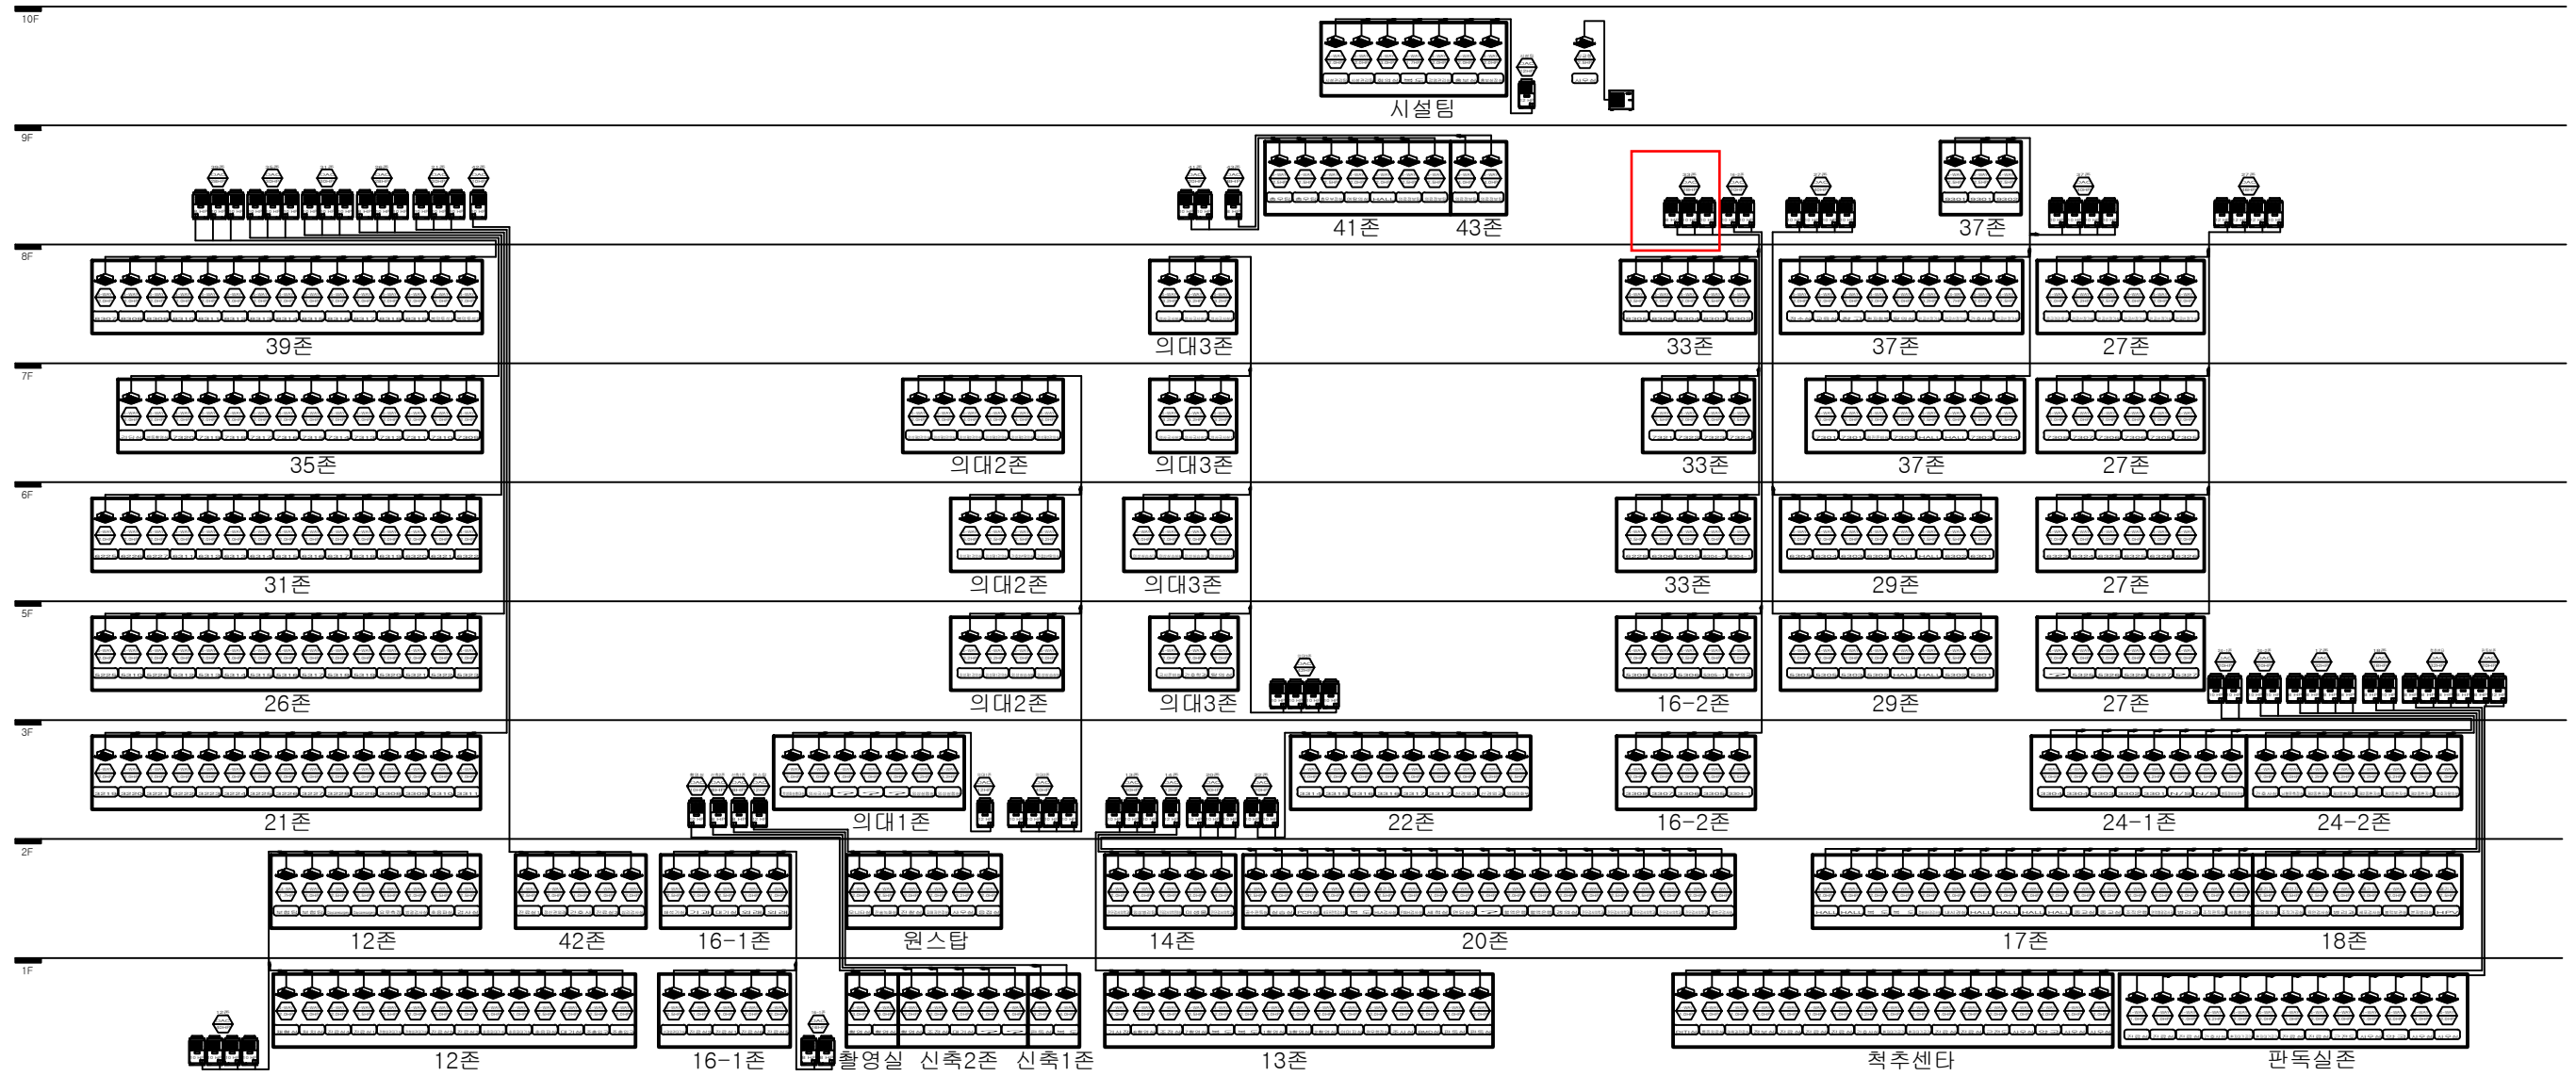

냉난방배관계통도

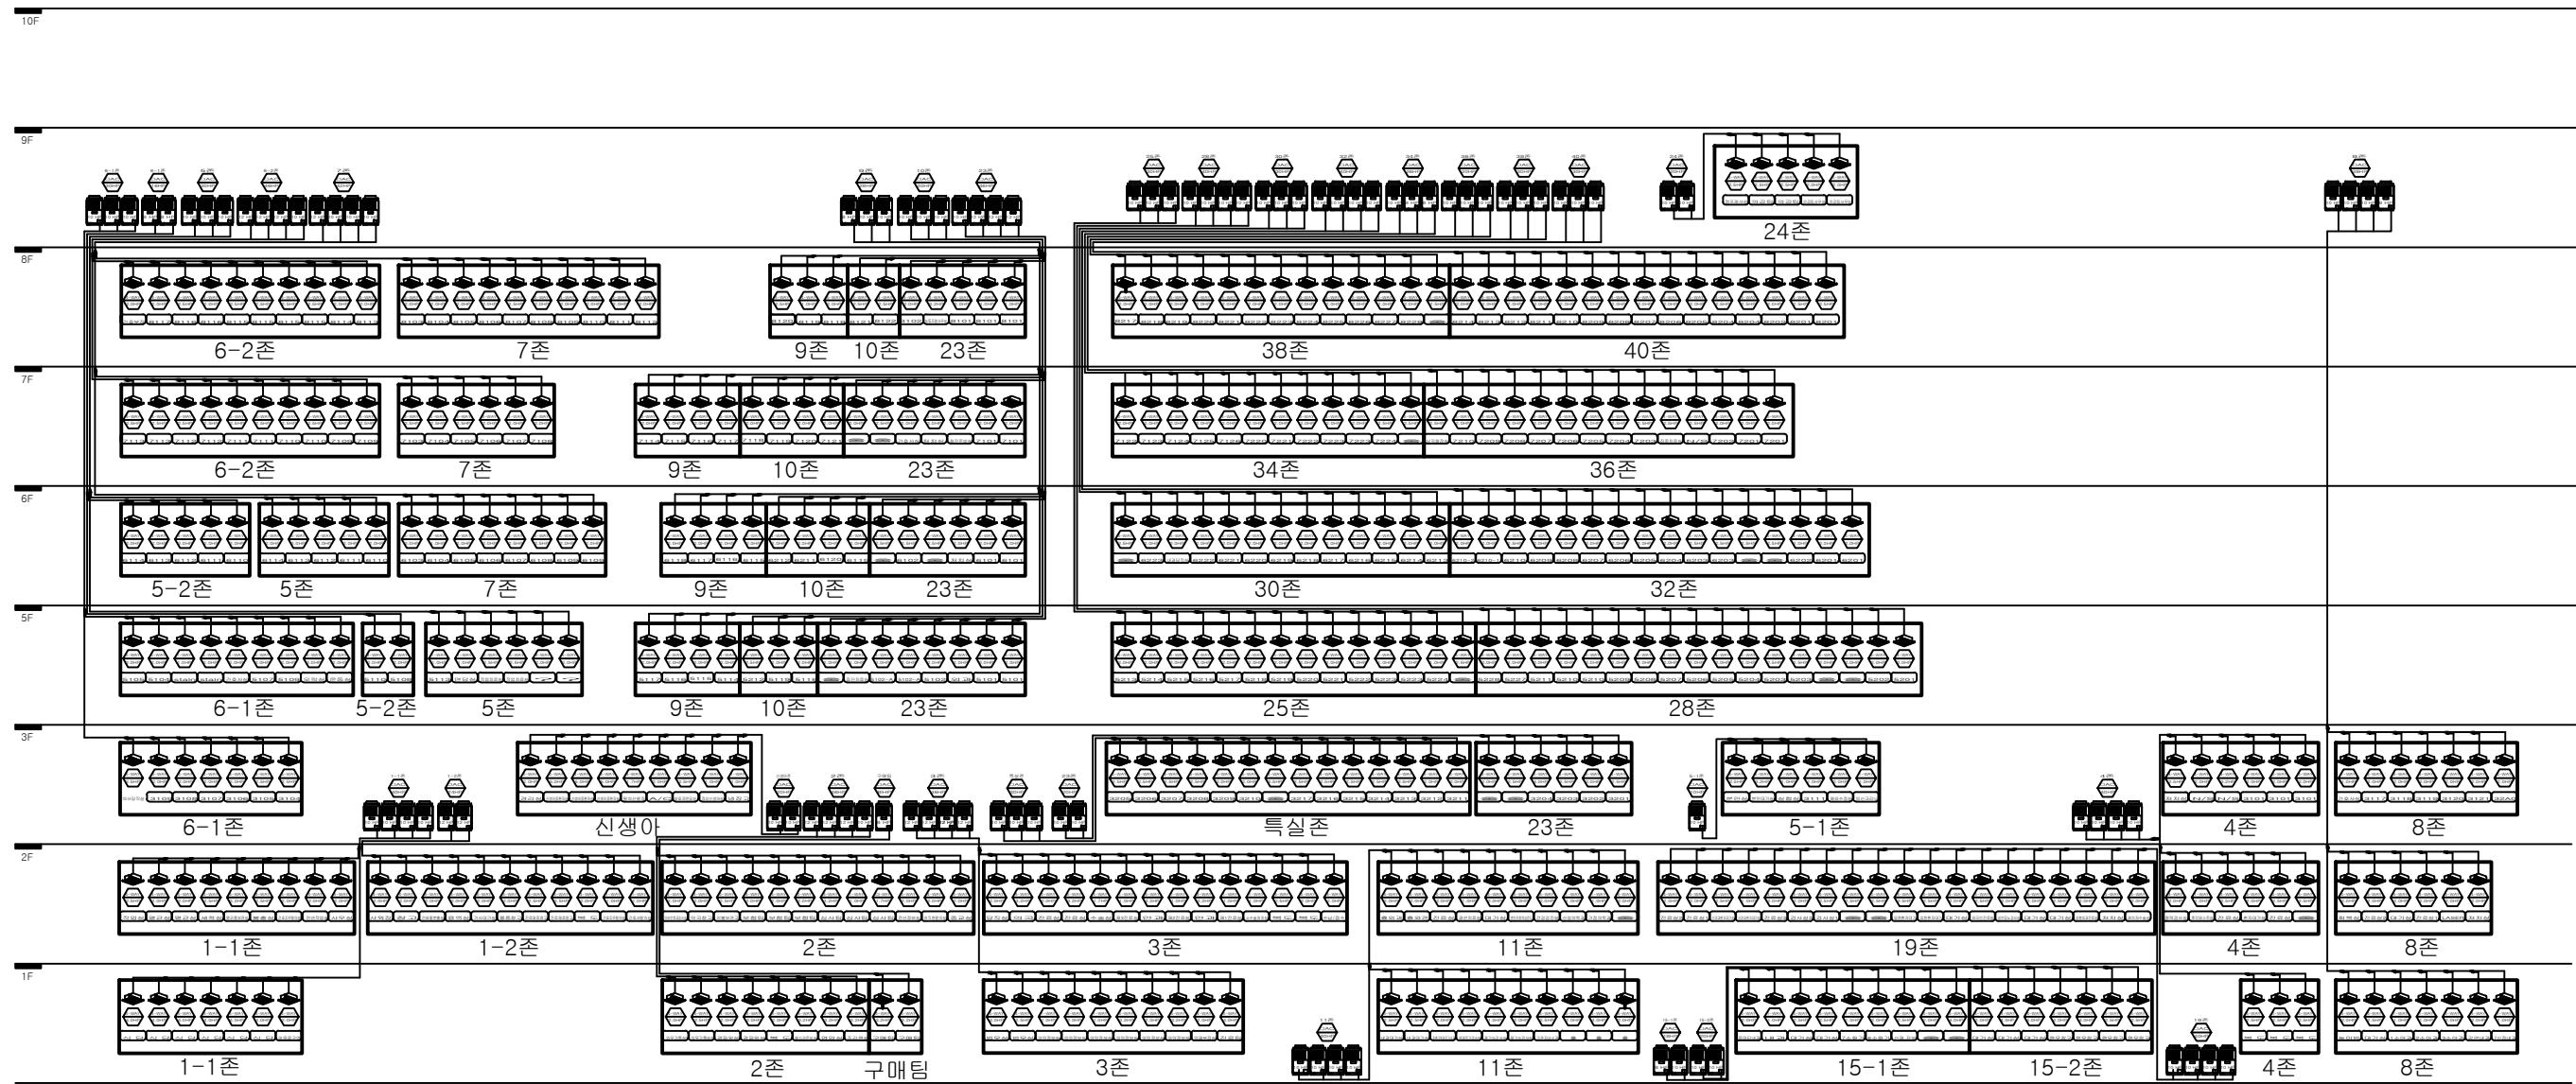


냉난방배관계통도

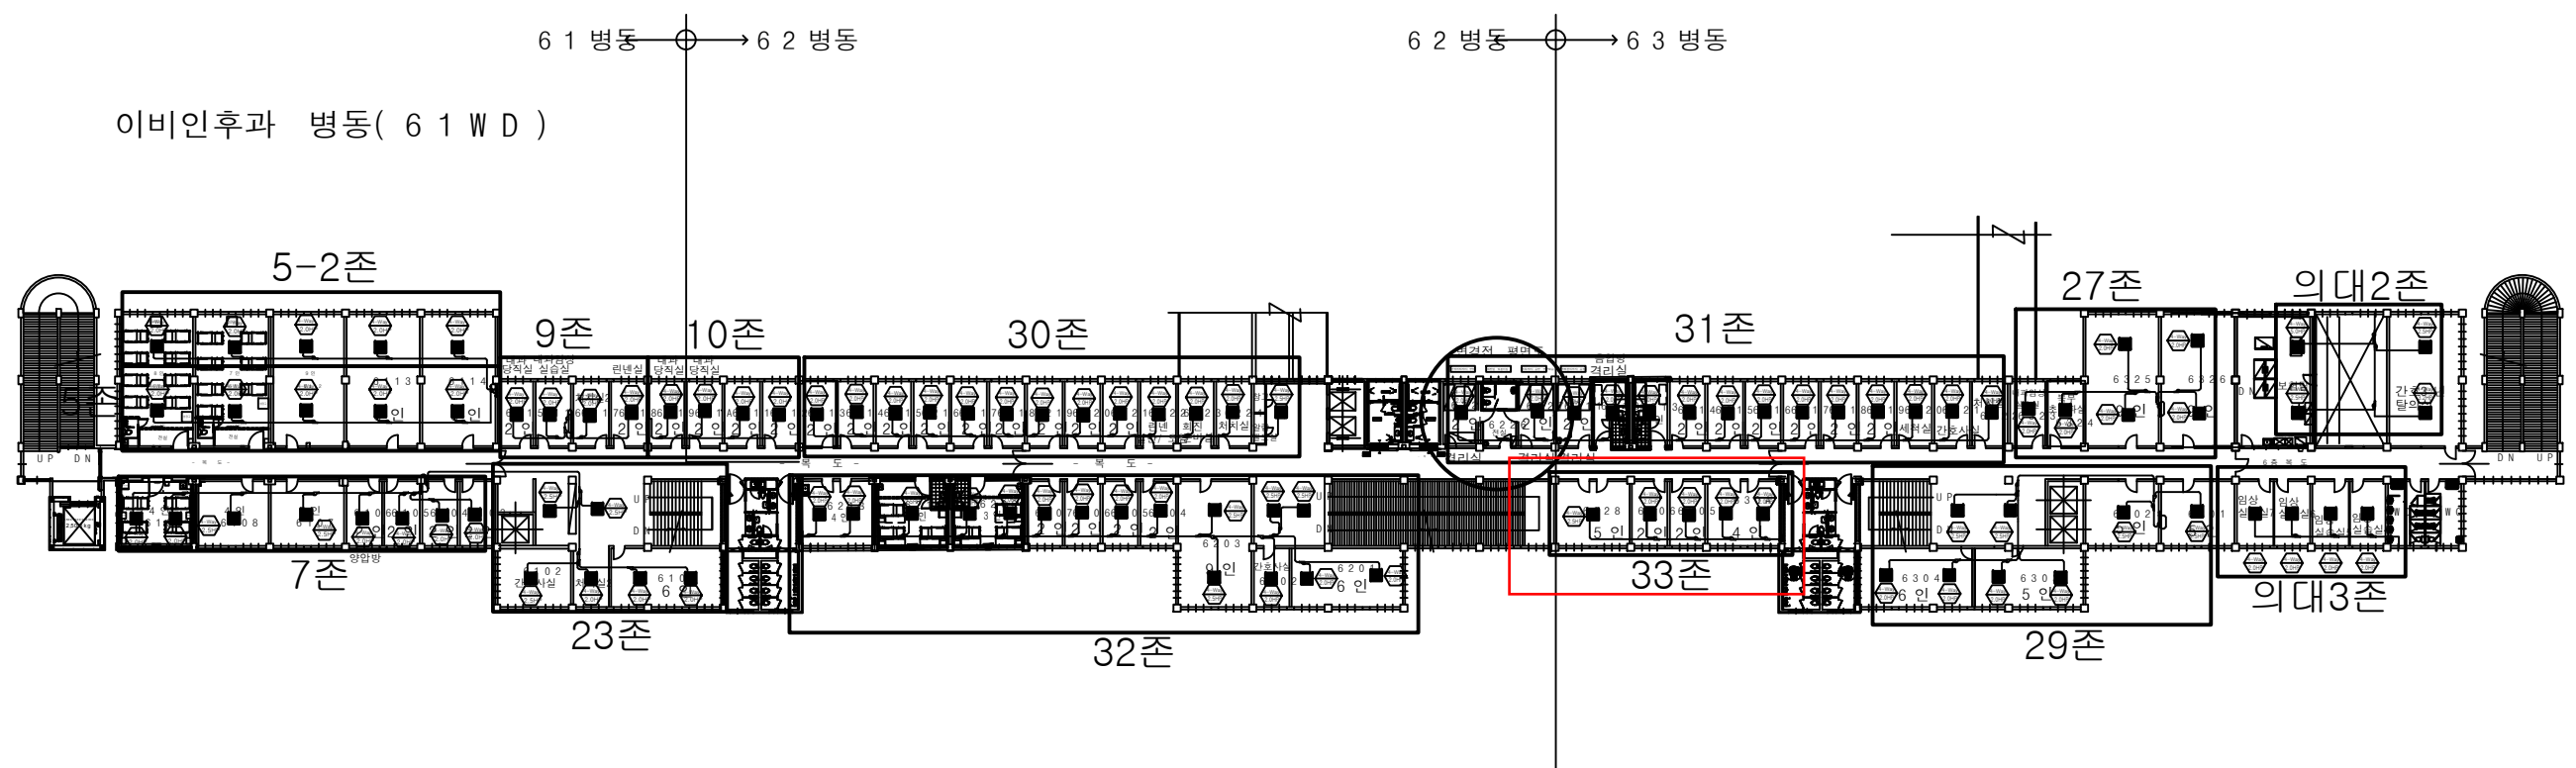


61 W D - 신경(N E) , 이비인후(E N) , 신장(2 W D) , - 연막(중양(H E) , 순환기(C D) , 류마티스(6 B W D) , - 내분비(7 B D) , 호흡기(R P) , 피부

육층 평면도

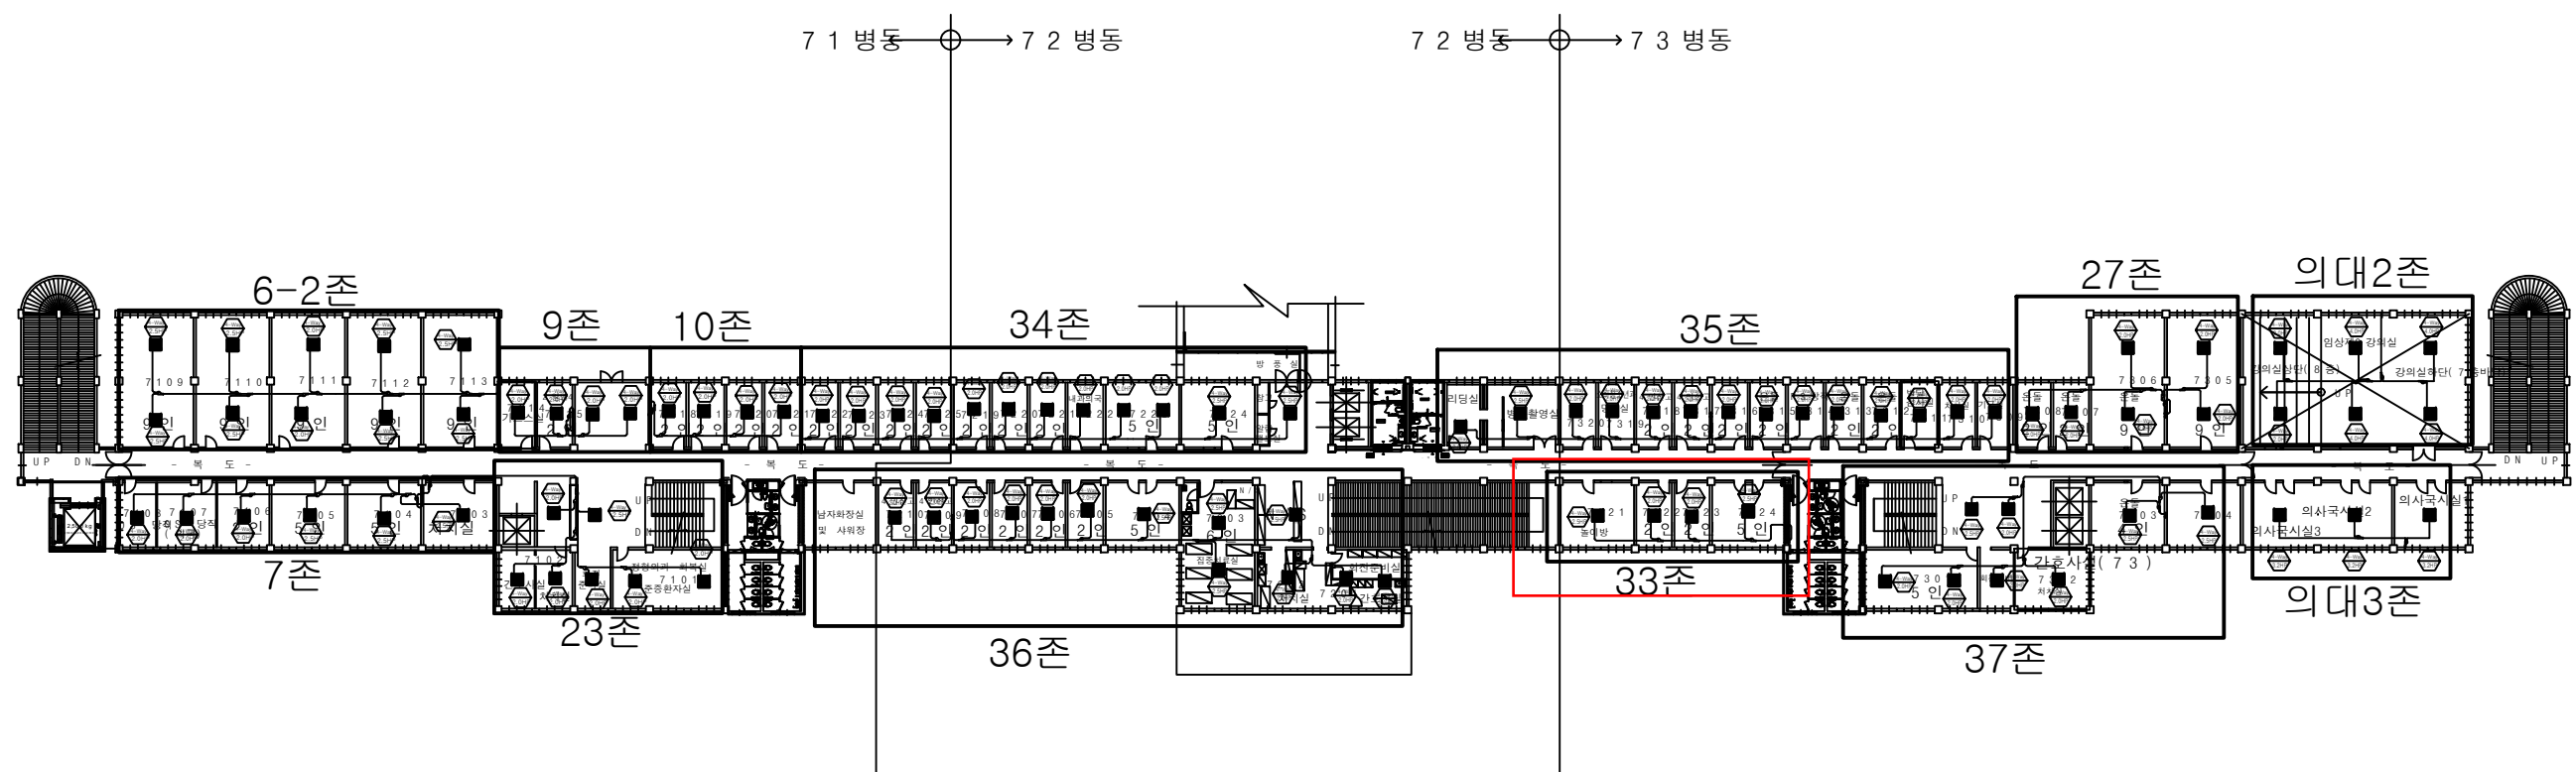

칠층평면도

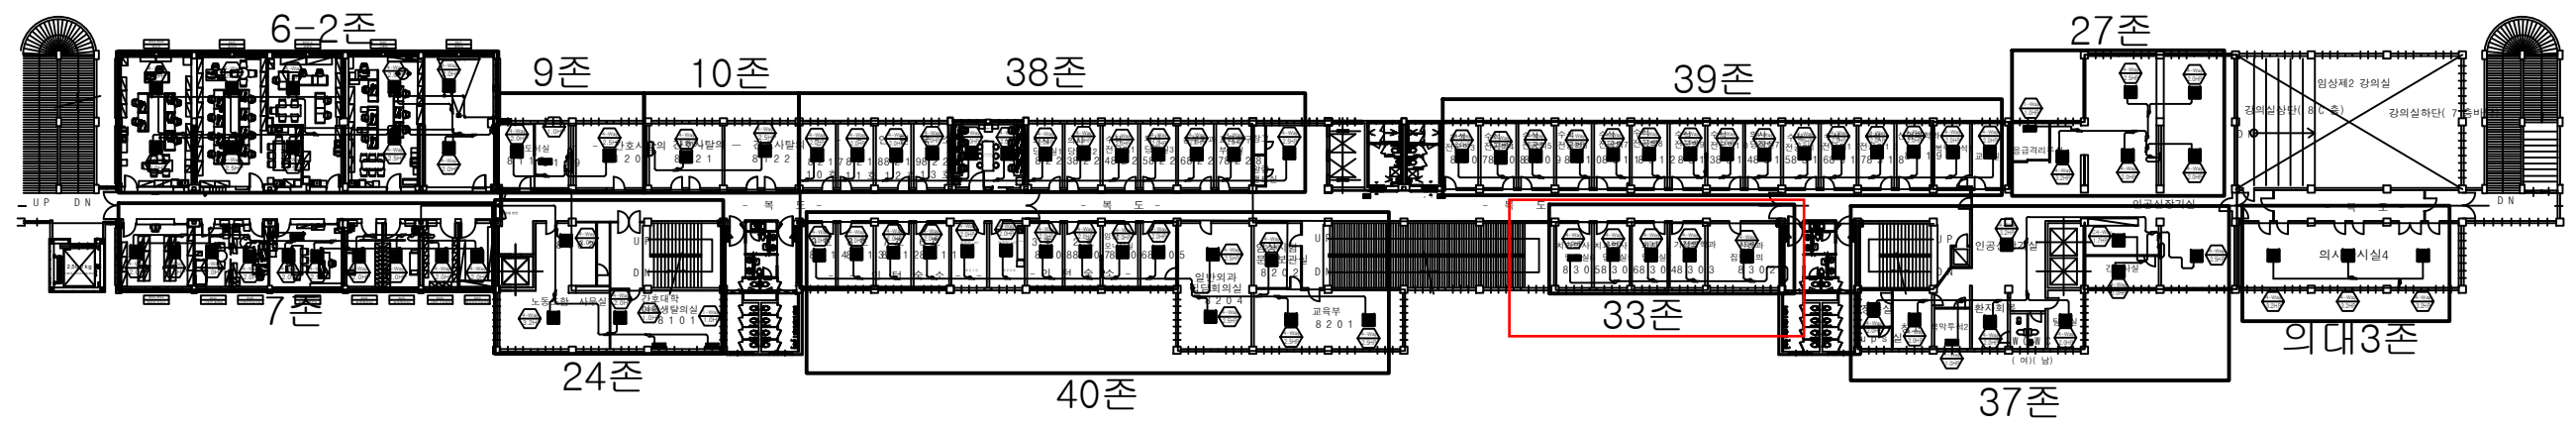

팔층 평면도